


MEC

MINGSTAR ELECTRONIC CORP.

Multilayer Chip Bead

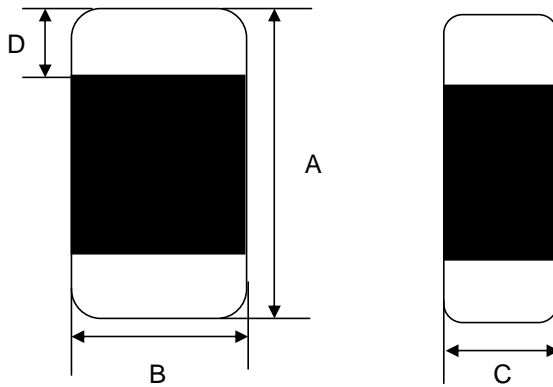

Dimensions:mm

A: 3.2 ± 0.2

B: 1.6 ± 0.2

C: 1.1 ± 0.2

D: 0.5 ± 0.3

Electrical characteristics

Part No.	TEST FREQUENCY (MHz)	IMPEDANCE (Ω)	DC RESISTANCE (Ω)Max	RATE CURRENT (MA)Max
CB321611N-190	100	19 \pm 25%	0.05	600
CB321611N-260	100	26 \pm 25%	0.05	600
CB321611N-320	100	32 \pm 25%	0.05	600
CB321611N-500	100	50 \pm 25%	0.10	500
CB321611N-600	100	60 \pm 25%	0.10	500
CB321611N-700	100	70 \pm 25%	0.10	500
CB321611N-900	100	90 \pm 25%	0.15	500
CB321611N-121	100	120 \pm 25%	0.15	500
CB321611N-151	100	150 \pm 25%	0.15	500
CB321611N-201	100	200 \pm 25%	0.20	400
CB321611N-401	100	400 \pm 25%	0.20	400
CB321611N-501	100	500 \pm 25%	0.20	400
CB321611N-601	100	600 \pm 25%	0.30	400
CB321611N-102	50	1000 \pm 25%	0.40	200
CB321611N-122	50	1200 \pm 25%	0.40	200
CB321611N-152	50	1500 \pm 25%	0.45	200
CB321611N-202	30	2000 \pm 25%	0.60	200